

E4 1-1/2" Plastic Bolted Pumps

Specifications and Performance

SPECIFICATIONS

E4

FLOW RATE (Adjustable)... 0-72 gpm (0-272 lpm)

PORT SIZE

Inlet and Outlet..... 1.50" ANSI/DIN Flanged

AIR INLET 0.50" NPT

AIR EXHAUST 0.75" NPT

SUCTION LIFT 15' Dry/25' Wet (4.57m/7.62m)

Teflon®..... 10' Dry/20' Wet (3.05m/6.09m)

MAX. PARTICLE SIZE (Dia.) 0.1875"(4.76mm)

SHIPPING WEIGHTS

Polypropylene 32 lbs (14.5 kg)


Kynar® 45 lbs (20.4 kg)



PERFORMANCE

Determined by actual flow meter tests.

E4

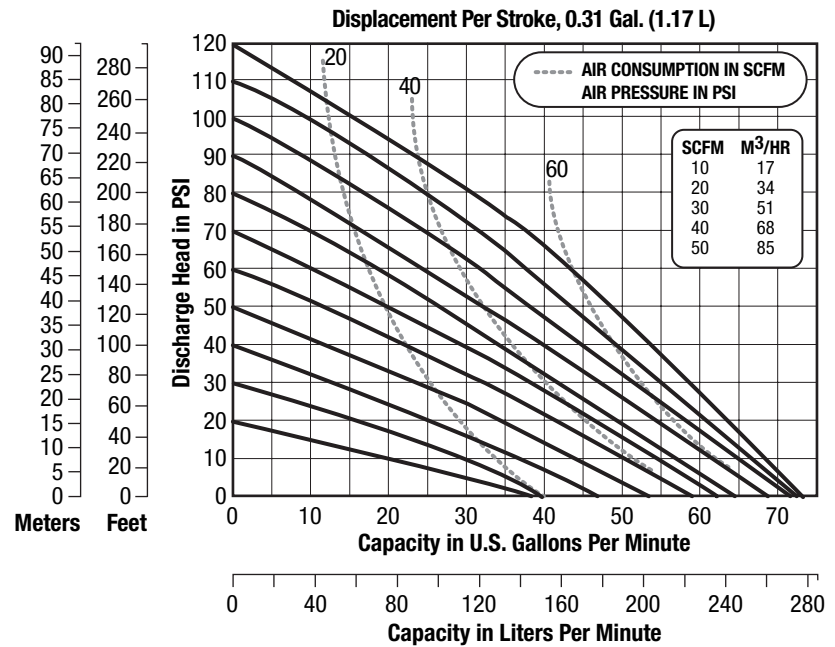

NOTE: For E4 pumps fitted with Teflon® diaphragms, reduce water discharge figures by 20%. Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet.

CAUTION: Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.
Swivel Inlet/Discharge.

DIMENSIONS

Consult factory for certified drawings.

E4

